




# SEALED METAL PLATINUM RTD CAPSULES MODELS 29258, 29259, 29260

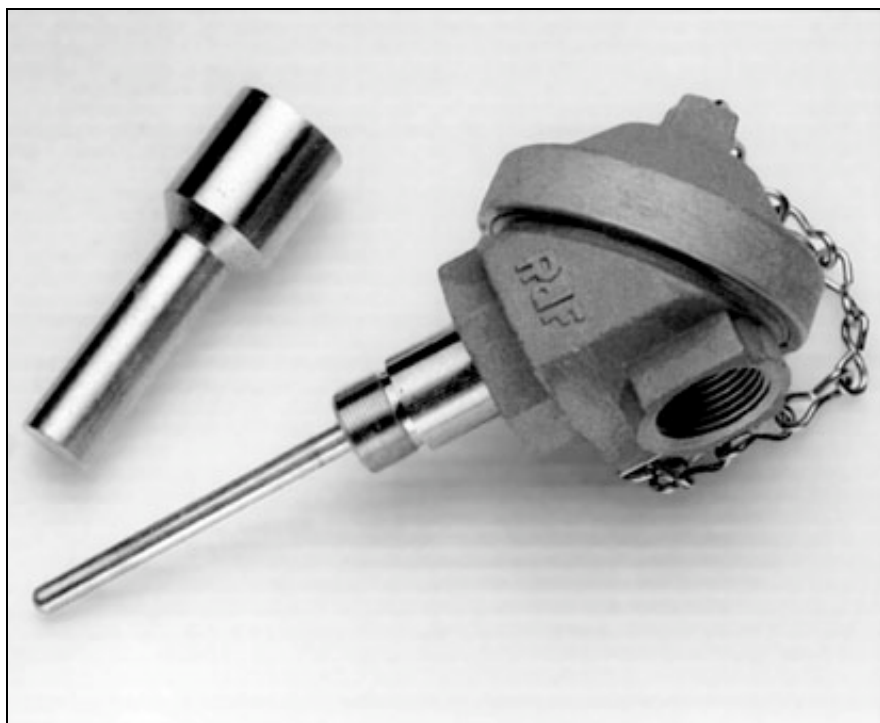

RdF has been supplying spring loaded temperature sensors to MIL-T-24388 for over twenty years. We offer these sensors with three different sensing elements: resistance temperature detectors (either nickel or platinum), and type K (Chromel/Alumel) ungrounded thermocouple. Military standard qualifications include: MIL-S-901 shock and MIL-STD-167 vibration testing.

We design these sensors to measure a variety of shipboard measurements including coolant fluid, stack temperature, and hydraulics for wet accumulators.

**Thermowells per MIL-W-24270 are also available.**

## Performance Specifications

### Type 21700 Resistance Temperature Detector

Reference Grade Platinum Element  $\alpha = 0.003923\Omega/\Omega^{\circ}\text{C}$

Resistance  $100.00\Omega@32^{\circ}\text{F}$ ,  $139.24\Omega@212^{\circ}\text{F}$

Temperature Range:  $-40^{\circ}\text{F}$  to  $1000^{\circ}\text{F}$

PN	MIL-T-24388B Classification	"L" LENGTH	"A" LENGTH
21700-1	RTEP-4-2 TW	4.44	1.75
21700-2	RTEP-6-2 TW	6.69	4.00
21700-3	RTEP-9-2 TW	9.69	7.00
21700-4	RTEP-10-4 TW	10.19	5.59
21700-5	RTEP-6-4 TW	6.44	1.75
21700-6	RTEP-8-4 TW	8.69	4.00
21700-7	RTEP-11-4 TW	11.69	7.00
21700-8	-	8.69	2.00

Teflon® and Kapton® are registered trademarks of Dupont

**Specialists in Temperature Measurement**

## Type 23700 Resistance Temperature Detector

Nickel Element  $\Omega = 0.0068\Omega/\Omega/^{\circ}\text{C}$ Resistance 120.00 $\Omega$ @32°F, 200.76 $\Omega$ @212°F

Temperature Range: -40°F to 400°F

PN	MIL-T-24388B Classification	"L" LENGTH	"A" LENGTH
23700-1	RTEN-4-2 TW	4.44	1.75
23700-2	RTEN-6-2 TW	6.69	4.00
23700-3	RTEN-9-2 TW	9.69	7.00
23700-4	RTEN-10-4 TW	10.19	5.59
23700-5	RTEN-6-4 TW	6.44	1.75
23700-6	RTEN-8-4 TW	8.69	4.00
23700-7	RTEN-11-4 TW	11.69	7.00

## Type 27700 Thermocouple JQ TCEK

Type K Thermocouple



ANSI-C96.1

Temperature Range: -40°F to 1500°F

PN	MIL-T-24388B Classification	"L" LENGTH	"A" LENGTH
27700-1	TCEK-4-2 TW	4.44	1.75
27700-2	TCEK-6-2 TW	6.69	4.00
27700-3	TCEK-9-2 TW	9.69	7.00
27700-4	TCEK-10-4 TW	10.19	5.59
27700-5	-	15.37	7.00
27700-6	TCEK-6-4 TW	6.44	1.75
27700-7	TCEK-8-4 TW	8.69	4.00
27700-8	TCEK-11-4 TW	11.69	7.00

## Dimensional Drawing

"L" = Length when installed into thermowell

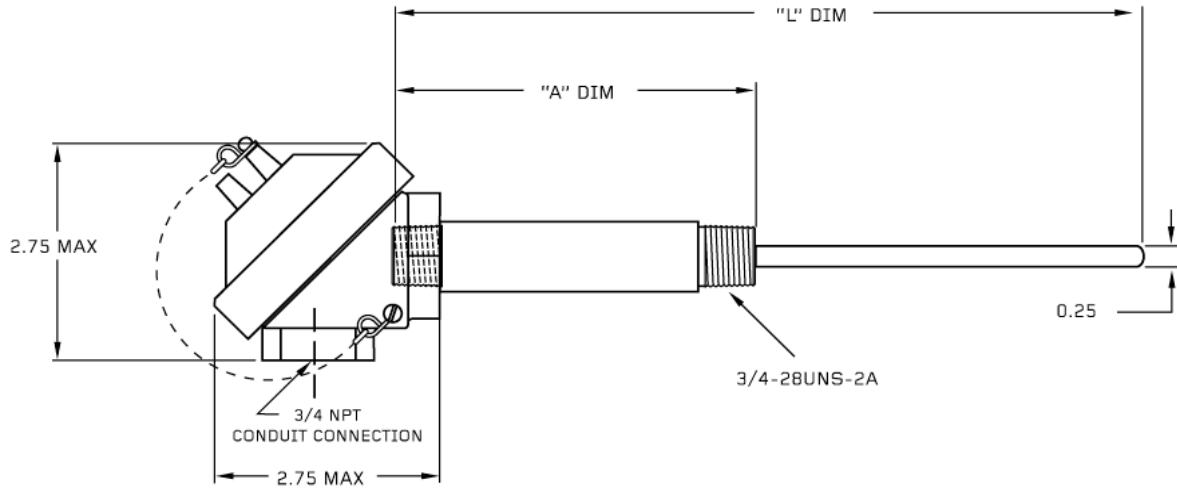

**RdF Corporation • 23 Elm Ave, Hudson, NH 03051-0490**  
800.445.8367 / 603.882.5195 • [sensor@rdfcorp.com](mailto:sensor@rdfcorp.com) • [www.rdfcorp.com](http://www.rdfcorp.com)

