

# TP301

SMART POSITION TRANSMITTER

4 to 20 mA + HART® Digital Communication



The **TP301** is from the well-known HART® family of SMAR's devices. It is a smart transmitter for position measurements. It can measure displacement or movement of rotary or linear type. The digital technology and communication provide an easy interface between the field and control room and several interesting features that considerably reduce the installation, operation and maintenance costs.

The TP301 is versatile and reliable, and has a very high accuracy. It may be used for control valve stem position measurement, or in any other position sensing application such as louvers, dampers, crushers etc. The TP301 is certified for operation in hazardous areas. Since the TP301 uses a non-contact magnetic coupling for position sensing, it is less sensitive to vibration than other solutions, resulting in longer operational life. Deadband due to mechanical imprecision does not exist. The TP301 applies to any linear or rotary valve, actuator or a variety of other devices through the use of mounting kits according to international standards such as VDI/VDE and IEC/NAMUR etc. Users can perform remote identification and check from the control room to verify its operational status and self-diagnostics. Since the TP301 is very versatile, users can use one position indicator for all different kinds of control valves and other machines, keeping spares and training to a minimum.

From the TP301, the operators can get on-line feedback of the valve's or machine's true position. This information may be used to fine-tune the loop for optimum production and tighter product uniformity and quality. As process control is getting more and more advanced, many control strategies depend on accurate valve or other position measurement.

Dual-compartment weather proof and flame proof housing prevents water, oil and dust from reaching the electronics, even when the field terminal side is open for wiring. The Hall effect type position sensor is totally enclosed within the housing, protecting it from damage and subsequent failure or accuracy degradation. The problem of oil and water collection is eliminated.

The same Hand-Held Terminal used for the other Smar devices in the 301 and 291 families, may also configure the TP301 using the appropriate datapack. You may also use the CONF301 PC software for Windows 3.1 and 95, together with the HI311 serial port interface.

The TP301 has another unique feature, it may optionally be fitted with a digital indicator. This indicator is not only used for local on-line monitoring of dynamic valve parameters, but also for local configuration using a special tool, a magnetic screw driver.

With TP301 it is very easy to upgrade an existing valve or machine to make use of the smart technology. All you need to do is to remove the old 4-20 mA position transmitter and put a TP301 in its place. Even the same wires, indicators and



controllers etc. can be used. From there it is also easy to upgrade to Fieldbus. This enables old plants to make a smooth transition to Fieldbus.

The TP301, besides the normal function of position measurement and 4-20 mA output generation, offers the following functions:

- ✓ Linear or Rotary Travel type;
- ✓ 0.1% F.S.;
- ✓ Position Calibration (4 and 20 mA points) via Local Adjustment or Remote Calibration via Hand Held Terminal;
- ✓ Non contact position sensing;
- ✓ Optional LCD indicator;
- ✓ Diagnostics and Configuration via HART® communication;
- ✓ Diagnosis.

### Reliable and Flexible

By eliminating many mechanical parts results higher reliability since less parts that wear due to there are less moving parts, TP301 is also more accurate since there is less deadband caused by mechanical imprecision.

Position sensing is done without any mechanical contact, virtually eliminating subsequent degradation. The TP301 directly senses longitudinal or rotary movement based on Hall effect. This position signal generates the 4-20 mA output signal.

## Functional Specifications

### Travel

Linear Motion: 10 - 100 mm.  
Rotary Motion: 30 - 120° rotation angle.


### Output Signal

Two-wire, 4-20 mA with superimposed digital communication.  
(Bell 202 - HART® Protocol)

### Reverse Polarity Protection

12 to 45 Vdc.

### Load Limitation

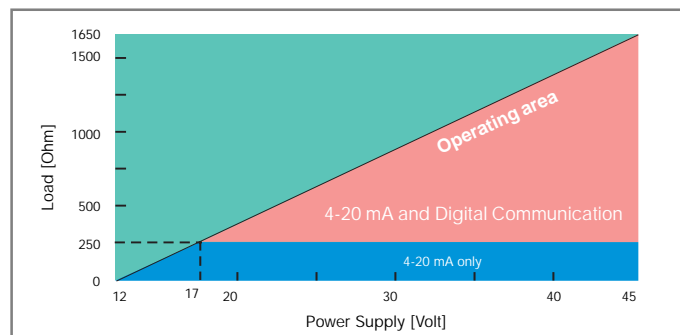

### Indicator

Optional 4½-digit numerical and 5-character alphanumeric LCD indicator.

### Hazardous Area Certifications

Explosion proof, weather proof and intrinsically safe.

### Zero and Span Adjustments

Non-interactive, via local adjustment or digital communication.

### Temperature Limits

Ambient: -40 to 85 °C (-40 to 185 °F).  
Process: -40 to 100 °C (-40 to 212 °F).  
Storage: -40 to 100 °C (-40 to 212 °F).  
Digital Display: -10 to 60 °C (14 to 140 °F).  
-40 to 85 °C (-40 to 185 °F) without damage.

### Failure Alarm

In case of sensor or circuit failure, the self-diagnostics drives the output to 3.6 or 21.0 mA, according to the user's choice.

### Turn-on Time

Performs within specifications in less than 5.0 seconds after power is applied to the transmitter.

### Update Time

Approximately 150 ms.

### Humidity Limits

0 to 100% RH.

### Output Action

Direct or Reverse.

### Actual Position Sensing

Magnetic (Non-contact) via Hall Effect.

### Configuration

By digital communication (HART® protocol) using the Configuration Interface CONF301 or the Hart Pocket Configurator HPC301. Can be done partially, through local adjustment.

### Performance Specifications

Reference conditions: range starting at zero, temperature 25 °C (77 °F), power supply of 24 Vdc.

### Accuracy

Linearity, hysteresis and repeatability effects are included.

### Resolution

≤ 0.1% F.S.

### Repeatability

≤ 0.5% F.S.

### Hysteresis

≤ 0.2% F.S.

### Stability

±0.1% of F.S. for 12 months.

### Temperature Effect

±0.8%/20 °C of F.S.

### Power Supply Effect

±0.005% of calibrated F.S. per volt.

### Electro-Magnetic Interference Effect

Designed to comply with IEC 801 and European Standards EN50081 and EN50082.

### Physical Specifications

#### Electrical Connection

½ -14 NPT, Pg 13,5 or M20 x 1,5 metric.

#### Material of Construction

Injected low copper aluminum with polyester painting or 316 Stainless Steel housing, with Buna N O-Rings on cover (NEMA 4X, IP67).

#### Mounting Bracket

Plated carbon steel with polyester painting or 316 SST.

#### Identification Plate

316 SST.

#### Approximate Weights

Without display and mounting bracket: 0.80 kg (aluminum).  
1.80 kg (316SS)

Add for LCD display: 0.13 kg.

Add for mounting bracket: 0.60 kg.

Hart is a trademark of HART Communication Foundation.


MODEL TP301	SMART POSITION TRANSMITTER - 4 to 20 mA + HART® Digital Communication	
CODE	Local Indicator	
0	Without Digital Indicator	
1	With Digital Indicator	
CODE	Mounting Bracket	
0	Without Bracket	
1	With Bracket	
CODE	Electrical Connections	
0	½ - 14 NPT	
A	M20 X 1.5	
B	Pg 13.5 DIN	
CODE	Type of Motion	
1	Rotary	
3	Linear Stroke Up to 15 mm	
5	Linear Stroke Up to 50 mm	
7	Linear Stroke Up to 100 mm	
Z	Others Specify	
CODE	Optional Items*	
H1	316 stainless steel housing	
ZZ	Special Options - Specify	

TP301 - 1 | 0 - 0 | 1 / \* ← TYPICAL MODEL NUMBER

\* Leave it blank for no optional items


## DIMENSIONS

Dimensions are mm (in)

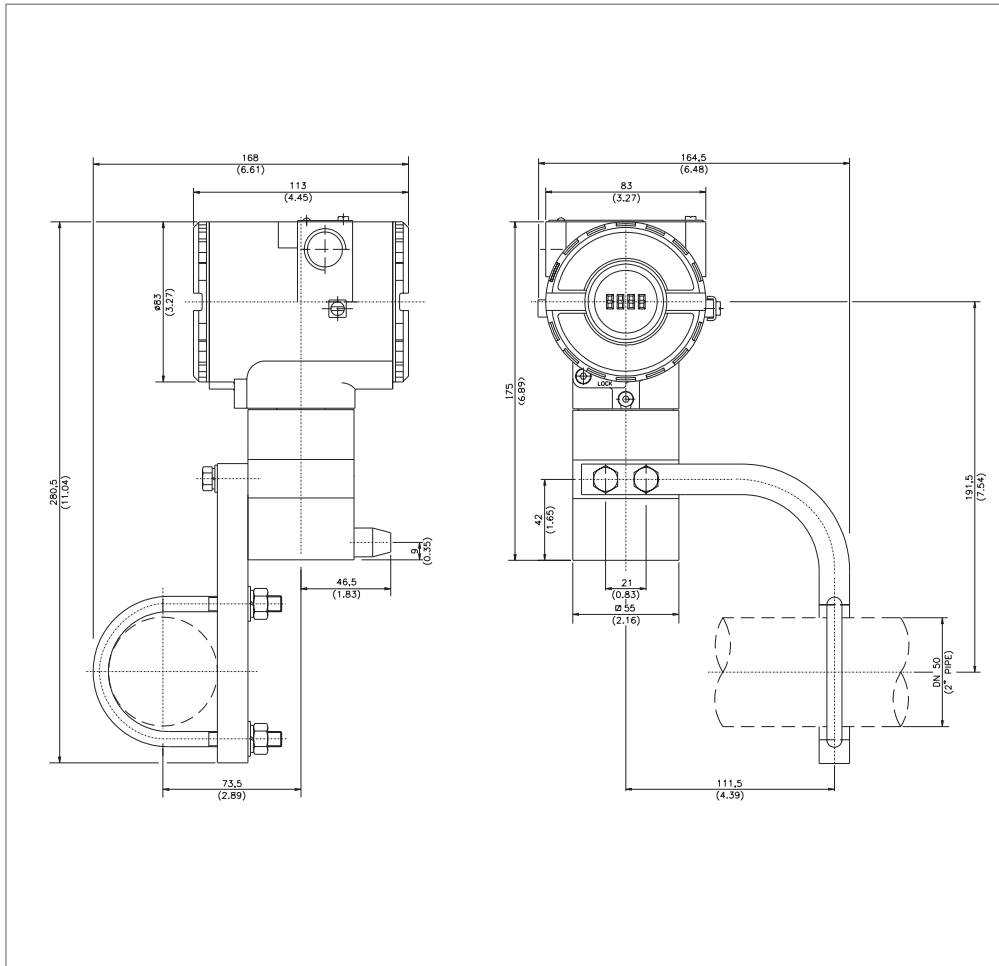


### Rotary Magnet

MOUNTING HOLES  
FOR M6x1  
SCREWS  
(2 PLACES)



### Linear Magnet

HOLE 6.3 (0.25)  
(2 PLACES)



TRAVEL	DIMENSION A
UP TO 15 mm (0.59)	44 mm (1.73)
UP TO 50 mm (1.97)	109 mm (4.29)
UP TO 100 mm (3.94)	185 mm (7.28)

**USA**

Smar International Corporation  
6001 Stonington Suite 100  
Houston, TX 77040  
Phone +1 713 849-2021  
Fax: +1 713 849-2022  
e-mail: sales@smar.com

Smar Research Corporation  
4250 Veterans Memorial  
Highway - Unit 156 - Holbrook 11741  
New York - USA  
Phone: 1 631 737 3111  
Fax: 1 631 737 3892

Smar Laboratories Corporation  
10960 - Millridge North,  
Suite 107 - TX 77070  
Houston - USA  
Phone: 1 281 807 1501  
Fax: 1 281 807 1506

**GERMANY**

Smar GmbH  
Rheingaustrasse 9  
55545 Bad Kreuznach  
Tel: + 49 671-794680  
Fax: + 49 671-7946829  
e-mail: infoservice@smar.de  
web: www.smar.de

**FRANCE**

Smar France (Main office)  
42, rue du Pavé des Gardes  
F-92370 Chaville  
Tel.: +33 1 41 15-0220  
Fax: +33 1 41 15-0219  
Mobile: +33 6 11 75 06 34  
e-mail: smar.am@wanadoo.fr

**MEXICO**

Smar Mexico (MEXICO CITY)  
Cerro de las Campanas No. 3, Despacho #119  
San Andres Atenco Z.P. 54040  
Tlanepantla, Edo. de México, México City  
Tel: +52 555 378 4600 / 378 4601 / 378 4602  
Fax: +52 555 378-4603  
e-mail: ventas@smar.com

**BRAZIL**

Smar Equipamentos Ind. Ltda.  
Rua Dr. Antonio Furlan Jr., 1028  
Sertãozinho - SP 14170-480  
Tel.: +55 16 3946-3510  
Fax: +55 16 3946-3554  
e-mail: smarinfo@smar.com  
web: www.smar.com.br

**CHINA**

Smar China Corp.  
3 Baishiqiao Road, Suite 30233  
Beijing Friendship Hotel - 100873, PRC  
Tel.: +86 10 6849-8643  
Fax: +86 10 6894-0898  
e-mail: info@smar.com.cn  
web: www.smar.com.cn

**SINGAPORE**

Smar Singapore  
315, Outram Road #06-07  
Tan Boon Liat Building - 169074  
Tel: 65 6324 0182  
Fax: 65 6324 0183  
e-mail: info@smar.com.sg

**ARGENTINA**

Smar Periféricos  
Muñecas 1246 (C1414AEL)  
Capital Federal - Argentina  
Tel/Fax: (5411) 4857-3050  
e-mail: info@smarperifericos.com  
web: www.smarperifericos.com

Plus a network of  
representatives in 58 countries.  
For your nearest representative  
please contact:  
smarinfo@smar.com